

Unit is easy to operate with light pressure from just one hand.


The seat is very comfortable and the single lever control is very easy to use. Just move push it forward or pull it backward with one hand to choose your direction of travel. The new single lever replaces the old two lever system to allow one hand operation. The new controls reduce operator fatigue during long days of operation.

The reversible seat has a Single Touch Swiveling control and allows Plenty of Leg Room.

The seat swivels 180 degrees with the easy and convenient single touch control. The swivel seat allows the operator to always face in the direction the unit is traveling so the operator is always facing forward even if the unit is moving in "reverse".

With a payload capacity of 5500 lbs it means that jobs can be completed more quickly.

The Yanmar engine packs the power to move the big 5500 pound payload in tough conditions.

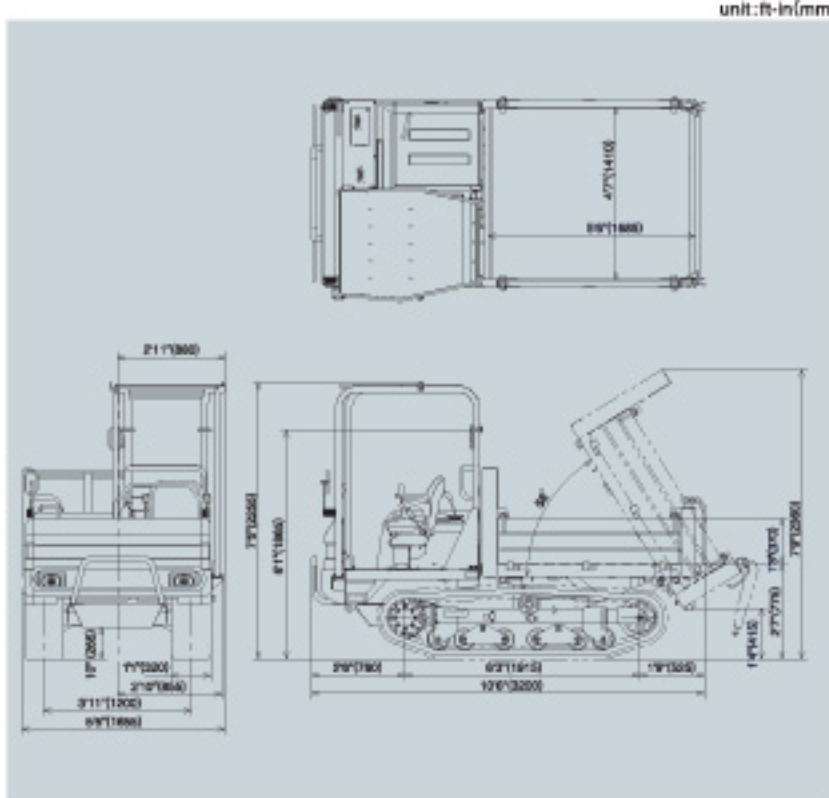

SPECIFICATIONS

Model		C30R-us		
Dump Vessel Type		-	One-way dump type	
Shape of Vessel		-	Box-shape	
Operating Weight	Net, unloaded	lbs (kg)	5050 (2290)	
Engine	Type	-	Direct injection combustion Water-cooled 3 cyl. Diesel	
	Model	-	3TNV88-FFW	
	Output	hp (kW)/rpm	32.9 (24.6) / 3000	
Transmission		-	Two speed automatic hydrostatic transmission and Reduction gear	
Under Carriage	Track type	-	Steel-reinforced rubber track	
	Track width	ft-in (mm)	1' (320)	
	Min. ground clearance	ft-in (mm)	10" (265)	
	Ground contact pressure	Unloaded	psi (kPa)	3.8 (26.2)
Loaded		psi (kPa)	8.0 (54.9)	
Brake	Service brake	Type	-	
		Operation	-	
	Parking brake	Type	-	
		Operation	-	
Performance	Max. payload	lbs (kg)	5510 (2500)	
	Max. dumping angle	degrees	58	
	Dump clearance	ft-in (mm)	1' 4" (415)	
	Dump body capacity	Struck	cu.yd (m ³)	1.15 (0.88)
		Heaped	cu.yd (m ³)	1.62 (1.24)
	Travel speed	Forward	mph (km/h)	Low speed 0-2.5 (0-4.0) / High speed 0-6.8 (0-11.0)
		Reverse	mph (km/h)	Low speed 0-2.5 (0-4.0) / High speed 0-6.8 (0-11.0)
	Traction force	lbs (kN)	5510 (24.5)	
Hydraulic System	Pump (for dump)	-	Gear	
	Control valve	-	Single spool, mechanical control	
	Pump displacement	cu.in (cm ³)/rev	0.40 (6.5)	
	Relief valve pressure	psi (MPa)	2490 (17.2)	
Fuel Tank Capacity		Gals (L)	10.6 (40)	

YANMAR CONSTRUCTION EQUIPMENT CO.,LTD.

EXPERT DEPT. CONSTRUCTION
1717-1 Kumano, Chikugo,Fukuoka 833-0055 JAPAN
TEL. (0942) 53-5465 FAX. (0942) 53-5132
<http://www.yanmar.co.jp>

YANMAR AMERICA CORP.

CONSTRUCTION EQUIPMENT DEPT.
101 International Parkway, Adairsville, GA 30103, U.S.A.
TEL:770-877-7570 FAX:770-877-7572
<http://www.yanmar.com>

Note : All information presented in this Brochure is subject to change without notice.