




# PT-100

Forestry Package &  
HD7460B Mulcher



The PT-100 Rubber Track Loader offers low ground pressure with exceptional traction for working in dense undergrowth or difficult terrain. The purpose-built HD7460B drum-style mulcher quickly processes trees and brush to any texture. The entire system is protected by ASV's premium forestry guarding package.

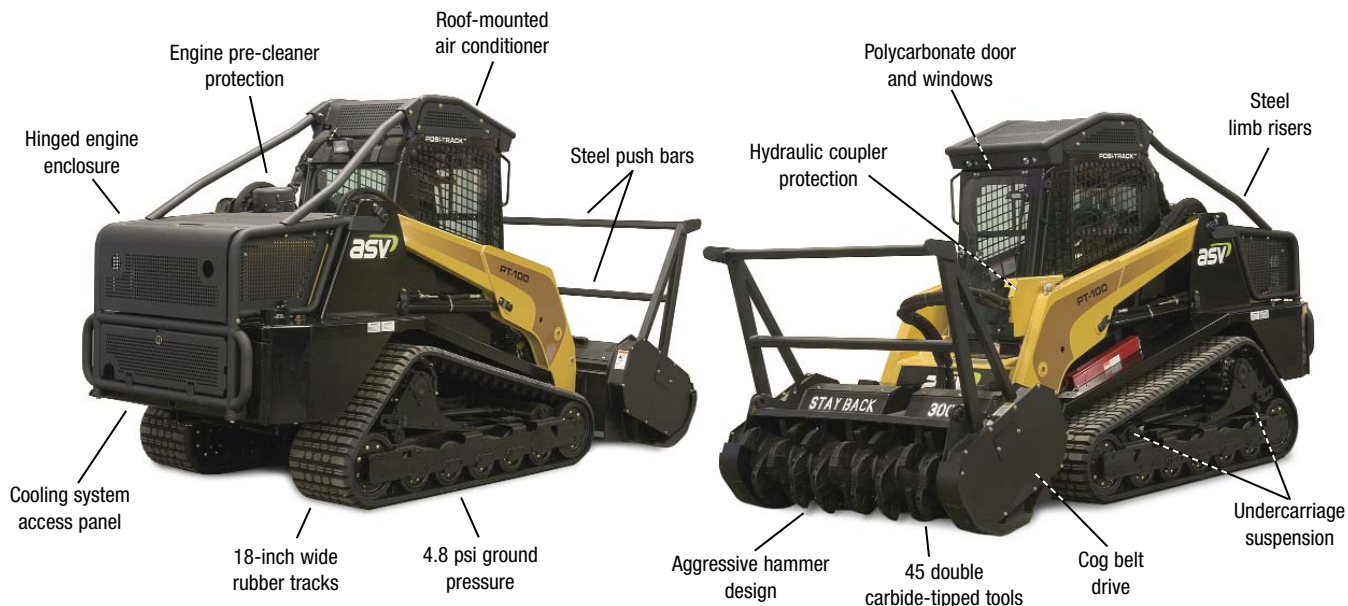

## A Complete and Powerful Mulching Package

The PT-100 Forestry Package with a HD7460B Mulcher combines all the key ingredients for high-production, high-quality brush mulching, including a powerful rubber track loader, a productive mulching head and a comprehensive guarding package that protects the entire system.

The PT-100 is the ideal platform for brush mulching. It's powerful, maneuverable and built to work in rugged environments over long hours. It

features ASV's patented rubber track undercarriage technology to maximize traction and flotation for working in soft or difficult ground conditions where other machines won't work at all.

The PT-100 uses its powerful 38 gpm / 3,300 psi hydraulic system to produce 73 hydraulic horsepower. A load-sensing system lets you run the mulcher and other attachments at maximum load without wasting power or creating excessive heat.

The new HD7460B is a powerful drum-style mulcher with 45 fixed-position double carbide tips that let you completely process a 60-inch wide path. It quickly processes trees up to 8-inches diameter and can plane stumps as large as 12-inch diameter to ground level.

The HD7460B was designed specially for use on the PT-100 and is positioned close to the loader for optimum balance and excellent visibility. It features a new 110 cc 2-speed drive system that uses a poly chain cog belt for efficient and reliable transfer of power to the drum.

The entire system is guarded by a package that includes a low-profile roof enclosure, limb-risers, hood protection, engine pre-cleaner screen kit, polycarbonate door and windows and complete belly-guard plates. Guarding plates are hinged to allow quick access for cleaning out debris and other routine machine maintenance. The package also includes a premium sound insulation kit to reduce the entry of dust and debris into the operator station.

### Specifications

Operating Weight, complete package*:	12,440 lb / 5845 kg
Ground Pressure, complete package*:	4.8 psi / 33 kPa
Overall Width, complete package*:	74 in. / 1880 mm
PT-100 Engine:	Perkins 1104C-44T diesel, turbocharged
PT-100 Gross Power @ 2800 rpm:	99.5 hp / 74 kW
PT-100 Engine Torque, peak:	304 ft-lb / 412 Nm
HD7460B Mulcher Weight:	2,388 lb / 1083 kg
HD7460B Rotor Drive Motor:	Parker, 6.7 in. <sup>3</sup> / 110 cc
HD7460B Rotor Brake:	Hydraulic
HD7460B Cutting Tools:	45 fixed-position, double carbide-tipped
HD7460B Tool Life, average:	300 - 500 hours
HD7460B Cutting Width:	60 in. / 1524 mm

\* Includes PT-100, HD7460B brush mulcher and guarding package - each available separately. Consult your ASV Dealer for complete PT-100 machine specifications.